



MASTERColour CDM-TP

GreenPowerCDM-TP 315W/T12/U/O GAV

Range of protected, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light to be used in open luminaires

Warnings and Safety

- Lamps may use electronic or electromagnetic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information		Operating and electrical	
Cap-Base	PGZX18. [PGZX18.]	Chromaticity Coordinate Y (Nom)	0.365
Operating Position	UNIVERSAL [Any or Universal (U)]	Correlated Color Temperature (Nom)	3100 K
Main Application	Agro	Luminous Efficacy (Rated) (Min)	95 lm/W
Life To 10% Failures (Nom)	12000 h	Luminous Efficacy (rated) (Nom)	104 lm/W
Life to 50% Failures (Nom)	20000 h	Color Rendering Index (Min)	-
ANSI Code HID	C182/O	Color Rendering Index (Nom)	92
Features	Protected (P)	Operating and electrical	
Light technical		Power (Nom)	315.9 W
Color Code	- [Not Specified]	Lamp Current Run-Up (Nom)	4.7 A
Luminous Flux (Rated) (Min)	30000 lm	Ignition Supply Voltage (Max)	4000 V
Luminous Flux (Rated) (Nom)	33000 lm	Ignition Peak Voltage (Max)	4000 V
Color Designation	- [Not Specified]	Ignition Supply Voltage (Min)	3000 V
Photosynthetic Photon Flux (PPF)	599 µmol/s	Re-Ignition Time (Min) (Max)	10 min
Chromaticity Coordinate X (Nom)	0.41	Ignition Time (Max)	3 s
		Voltage (Max)	115 V

MASTERColour CDM-TP

Voltage (Min)	90 V
Voltage (Nom)	98 V
Controls and dimming	
Run-Up Time 90% (Max)	3 min
Mechanical and housing	
Bulb Finish	Clear
Overall Length (Max)	7.6 in
Bulb Shape	T12 [38 mm (T12)]
Approval and application	
Picogram Per Lumen Hour	44.4 pg/lm.h
Mercury (Hg) Content (Max)	28 mg
Energy Consumption kWh/1000 h	346 kWh
UV	
Pet (Niosh) (Nom)	241 h/500lx

Damage Factor D/fc (Nom)	0.17
Luminaire design requirements	
Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Nom)	250 °C
Pinch Temperature (Max)	350 °C
Product data	
Full product code	871869959215800
Order product name	GreenPowerCDM-TP 315W/T12/U/O GAV
EAN/UPC - Product	8718699592158
Order code	928493400030
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928493400030
Copy Net Weight (Piece)	0.200 g


Dimensional drawing



GreenPowerCDM-TP 315W/T12/U/O GAV

Product	D	D	C
GreenPowerCDM-TP 315W/T12/U/O GAV	1.5 in	38 mm	193 mm

Photometric data

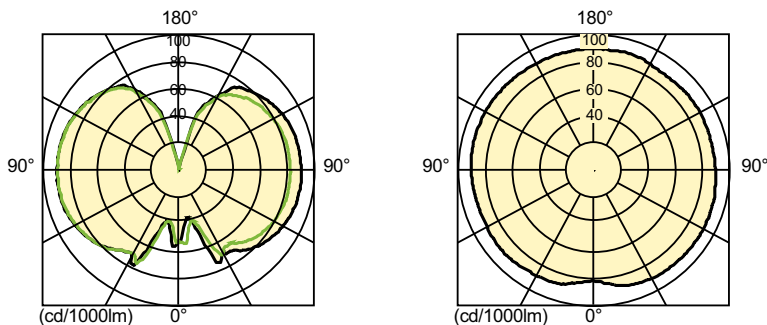

LDLD_D-CDM-T_315W_930_--Light distribution diagram

